


MR-PD04-X

4 Way Splitter

Can be used to split a signal from a source or combine signals from multiple sources.

Additional Features:

- Bi-directional splitter/combiner.
- Wide frequency range.
- Reliable and stable performance.
- Easy installation.

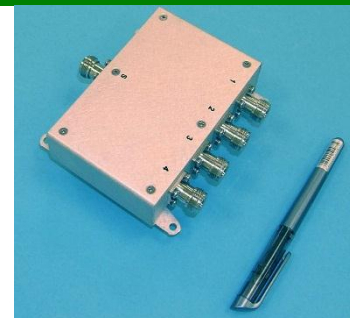

Specifications

Electrical

Frequency range	800-2200 MHz
Insertion Loss, max.	1.5 dB
Output VSWR, max.	2 : 1
Amplitude Balance, max.	0.7 dB
Phase Balance, max.	7°
Isolation, typ.	17 dB
Impedance	50 Ohm
Input Power (Load VSWR <2)	60 Watt

Mechanical

Dimensions (L x W x H)	120 x 110 x 30 mm (4.7" x 4.3" x 1.2")
Number of Outputs	4
Connectors	N-Type, Female
Mounting	Planar / Wall / Ceiling Mount

Environmental

Operating Temperature Range	-40°C to +70°C
Humidity, min.	95%
Splash, Dust	Protected

Mars Antennas & RF Systems proprietary information

MARS reserves the right to make technical changes or modifications to any of its products and specifications without prior notice and without implementing such changes to prior supplied products. Product images are representative and indicative only. Warranty terms and general conditions of sale are applicable on any purchase of any product, available on MARS website.

3 Hamanor st. Holon 58861, P.O.Box 5 AZOR 58008, Israel

Tel: +972-3-5599661 • Fax: +972-3-5599677 • e-mail: mars@marsant.co.il • web: www.mars-antennas.com