


MA-AGP15-5

Active GPS Antenna

MARS Active GPS Antenna features stable and efficient performance. Antenna is small and has an aesthetic design.

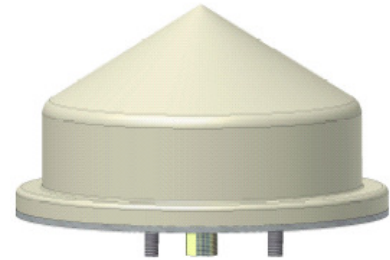

Specifications

Electrical	
Frequency range	1575.42±2 MHz
1 dB points Bandwidth, typ.	15 MHz
Gain Characteristics of Antenna Element	+5.0 dBic minimum at zenith -10 dBic minimum at 0° elevation
VSWR, typ.	2 : 1 @ 1575.42
Polarization	Right Hand Circular
3 dB Beam-Width, H-Plane, typ.	360°
3 dB Beam-Width, E-Plane, typ.	±40°
Filtering, typ.	40 dB @ ±50 MHz
LNA Gain, typ.	35 dB
Noise Figure, typ.	2.8 dB
Output Impedance	50 Ohm
Power Supply through RF Cable, typ.	(3-5)VDC @ (20-30)mA
Mechanical	
Dimensions (ØxH)	170 X 100 mm
Weight	500 gr.
Connector	N-Type Female
Mount	MNT 22
Radome	UV Protected Polycarbonate
Water Proofing	IP-67
Environmental	
Operating Temperature	-40°C to +85°C
Dynamics	Vibration: ETSI EN 300-19-2-4
Humidity	ETSI EN 300-19-2-4
Immersion Test	EN 60529-IP67
UV Radiation	ASTM G-154-4
Immunity to electrostatic discharge	ETSI IEC 61000-4-2
Conducted immunity to voltage surges	ETSI IEC 61000-4-5

Mars Antennas & RF Systems proprietary information

MARS reserves the right to make technical changes or modifications to any of its products and specifications without prior notice and without implementing such changes to prior supplied products. Product images are representative and indicative only. Warranty terms and general conditions of sale are applicable on any purchase of any product, available on MARS website.

3 Hamanor st. Holon 58861, P.O.Box 5 AZOR 58008, Israel

Tel: +972-3-5599661 • Fax: +972-3-5599677 • e-mail: mars@marsant.co.il • web: www.mars-antennas.com